

WALL WASHER

| CATALOG NO. | LAMPS | BALLAST | POWER FACTOR | LENGTH | WIDTH | DEPTH | PCS/CTN | UNIT WT. |
|-------------|-------|---------|--------------|--------|-------|-------|---------|----------|
| WW 140 | 1-34W | Rapid | High | 48 | 8 | 8 | 1 | 18 |
| WW 240 | 2-34W | Rapid | High | 48 | 8 | 8 | 1 | 18 |
| WW 140 | 2-34W | Rapid | High | 96 | 8 | 8 | 1 | 36 |
| WW 240 | 4-34W | Rapid | High | 96 | 8 | 8 | 1 | 36 |




- ⓓ Housing and ends are die-formed steel, finished with baked white polyester powder coating.
- ⓓ Ideal mounting when light is needed where the wall meets the ceiling.
- ⓓ Rapid Start (RS) models.
- ⓓ Standard lens is 1/2" x 1/2" x 1/2" milk white styrene plastic.
- ⓓ Shielding is removable without tools.
- ⓓ Unit or row installation.




H Lighting Company, Inc. • St. Louis, Missouri • 314/773-1176 • FAX 314/773-2890

All H & H Lighting Fixtures are completely wired for 118 volts 60 cycle A.C. operation. Ready for installation. All fixtures bear the I.B.E.W., A. F. of L. and Underwriters Laboratories, Inc. labels.

WALL WASHER

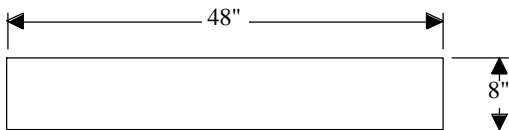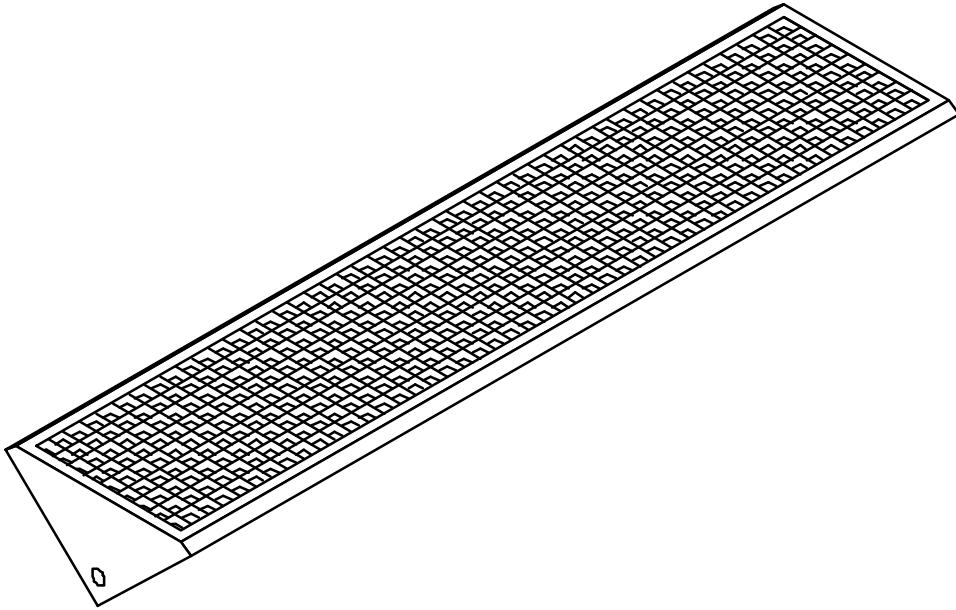

WALL SIDE

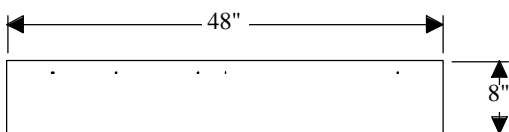

CEILING SIDE

MOUNTING - Complete with knockouts for surface mounting or pendant mounting, individually or in continuous rows. Pendant mounting accessories available on specification. Conduit knockouts are supplied on ends.

ELECTRICAL - Furnished standard with UL listed ballasts, for 120 Volt 60 Hz A.C. operation. Other voltages and accessories available. Fixtures bear the I.B.E.W., A.F. of L., and Underwriters' Laboratories, Inc. labels.

APPLICATION - All industrial fixtures are designed for quick, easy installation, either hanging or flush, individually or in continuous rows. Heavy duty construction. Ideal for corner, cornice, and wall illumination.

CONSTRUCTION - Wireway and ends die-formed of code gauge steel, finished in automatic bonderizing, rust preventative process, with high reflectivity powder coated baked white enamel. Reflector is removable for easy access to electrical components.